



PROTECTION OF THE SHAFT: NORM UNI-EN-ISO-13857:2020  
 FOR PROTECTION WITH METALLIC GRID, USE A COMPACT 10x10mm


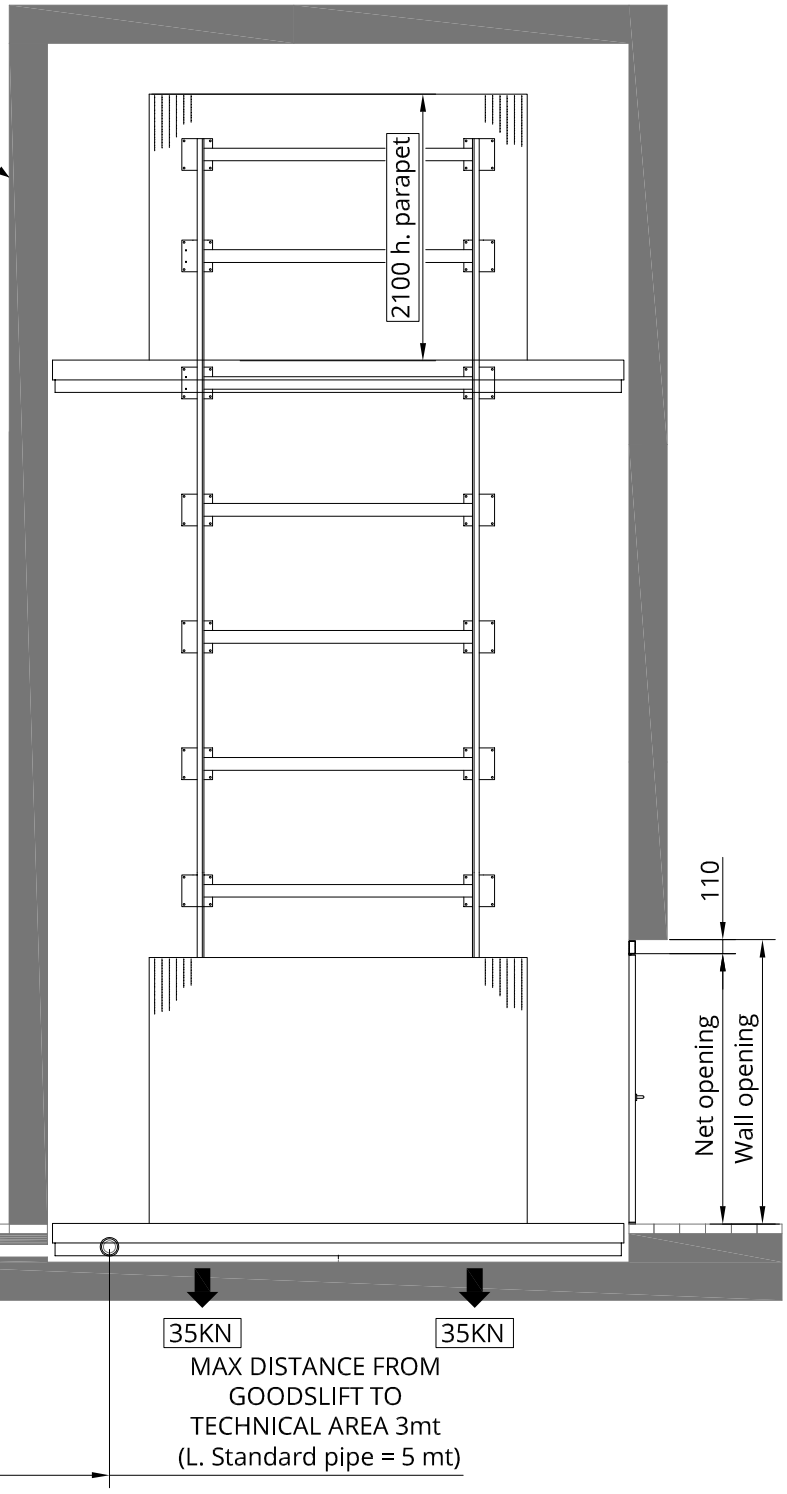


WALL IN CONCRETE CLASS 20/25  
 Standard fixing: Anchor mod. Wurth W-BS/S 14x130  
 Impact wrench necessary to fixing anchors

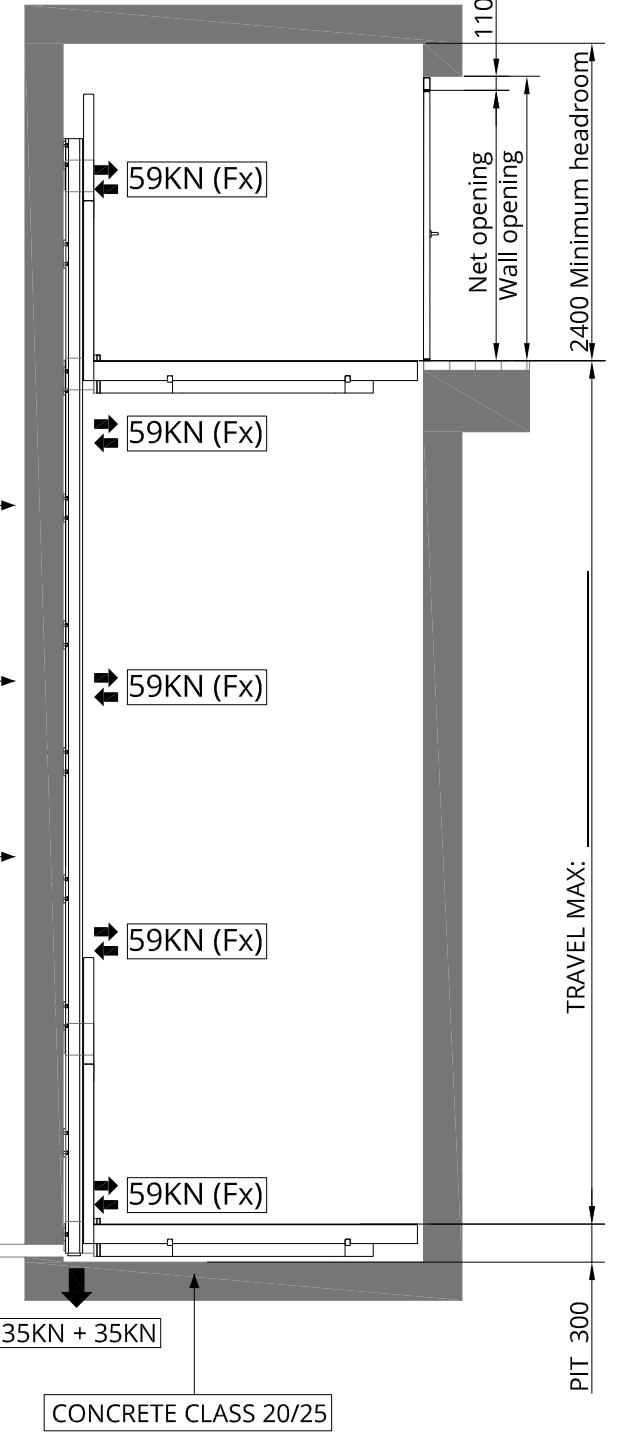


TECHNICAL AREA AT FLOOR "0"

Door frame fixed on concrete side walls. Wall plugs provided by Updinamic

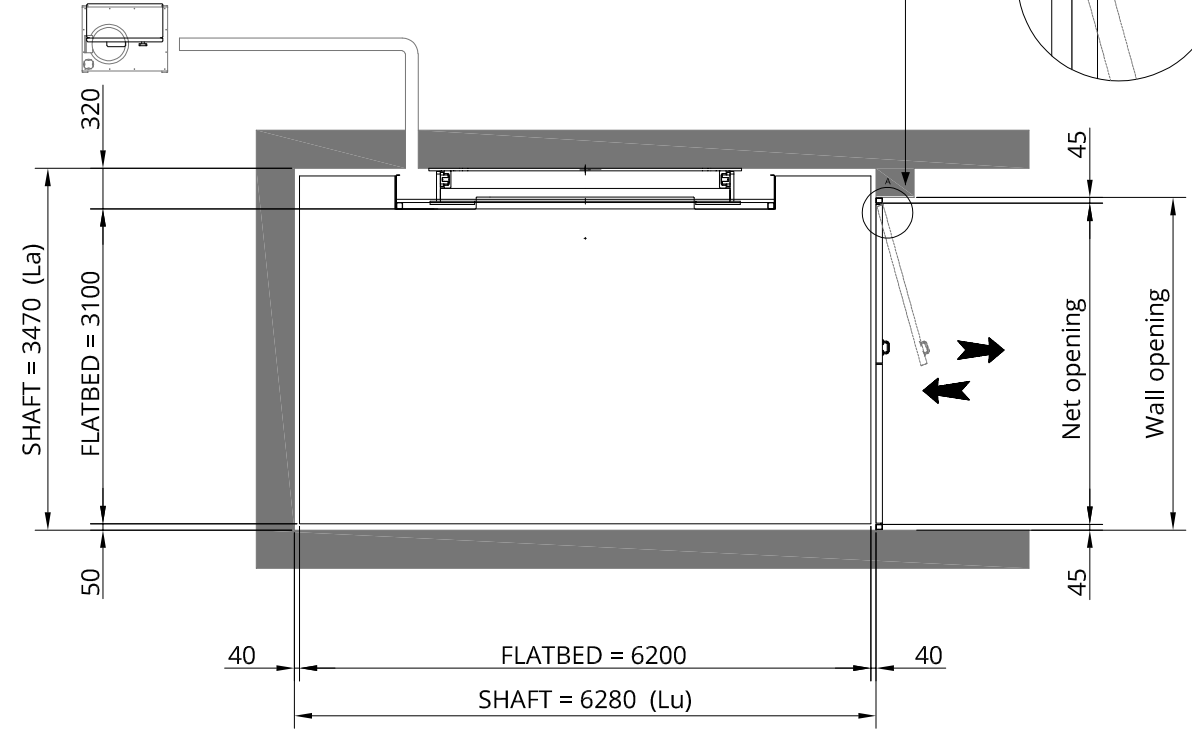

\* In order to open the door leaves more than 90° and use the full passage width, the wall thickness must be less than 100mm.

MARK THE ENTRANCES AND THE FLOOR HEIGHTS

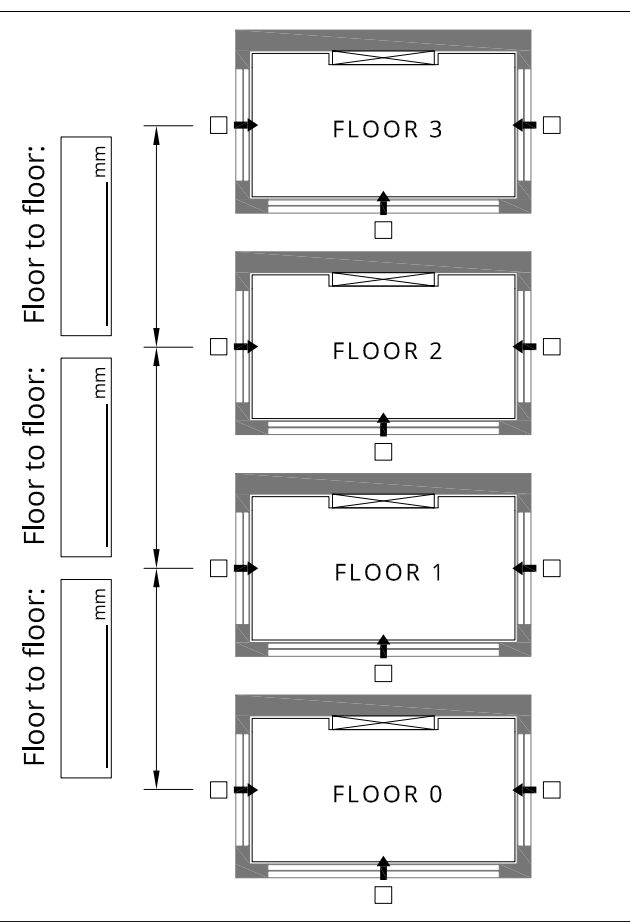

MODEL: DL2 - 2500Kg

PREPARE POWER F+N+T or 3F+T+N SWITH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A

| Motor | Tension-functioning | Speed CM / | Starter | Rated current | Starter current |
|-------|---------------------|------------|---------|---------------|-----------------|
| 5,5kW | 240 V - trifase     | 8,5        | Direct  | 17            | 51              |
|       | 400 V - trifase     |            | Direct  | 10            | 30              |
| 11kW  | 240 V - trifase     | 15         | Direct  | 34            | 102             |
|       | 400 V - trifase     |            | Direct  | 20            | 60              |

NOTA: THRESHOLD ADAPTATION BY THE CUSTOMER THE ADAPTATION NEEDS A 45° CHAMFER INSIDE THE SHAFT

FOR THE DOOR INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL MAX 100 mm FROM THE SHAFT DIMENSIONS (mm)

**UPDINAMIC** s.r.l.  
 Via Modigliani, 22 - 37045 Legnago (VR)  
 Tel. 0442.59.01.29 - Fax. 0442.59.90.91  
 www.updinamic.com - e-mail: info@updinamic.com

DESCRIPTION: MODEL : DL2 - 2500Kg  
 TRAVEL MAX: 16000mm FOR GOODS ONLY  
 Client: Date: 01/05/2024  
 Drawing n.: TAV-DL2DEC1-01  
 Reference:  
 Revision:



DATE: \_\_\_\_\_

SIGNATURE FOR APPROVAL: \_\_\_\_\_