
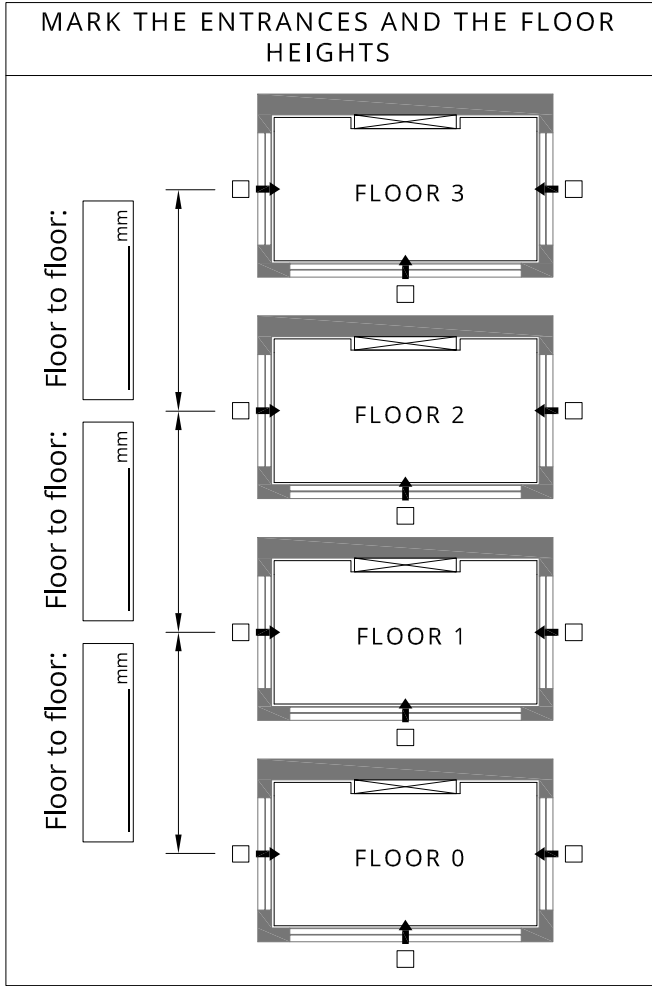
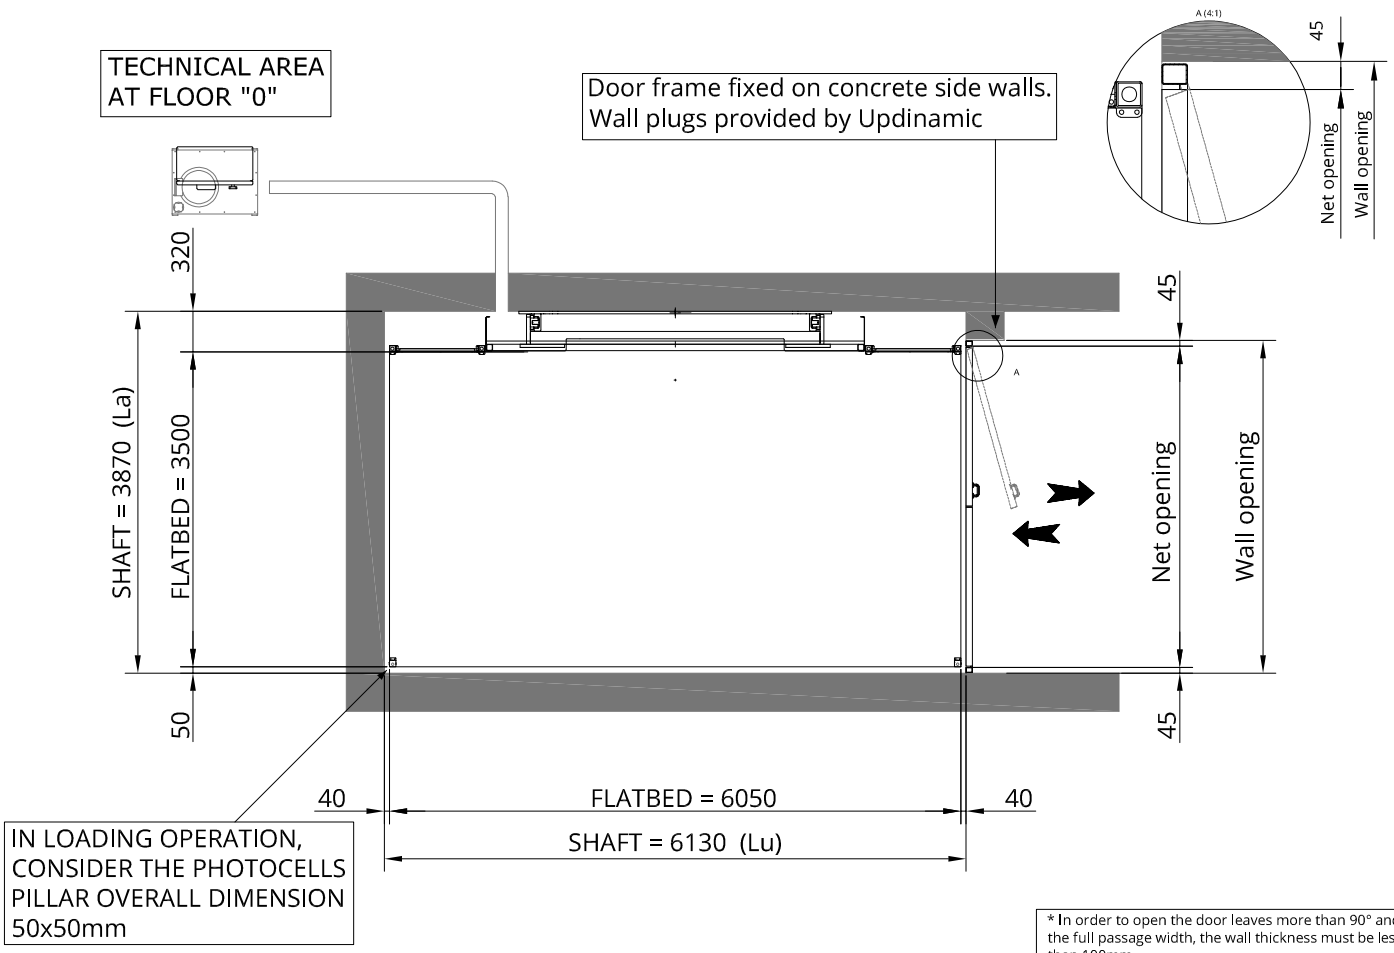
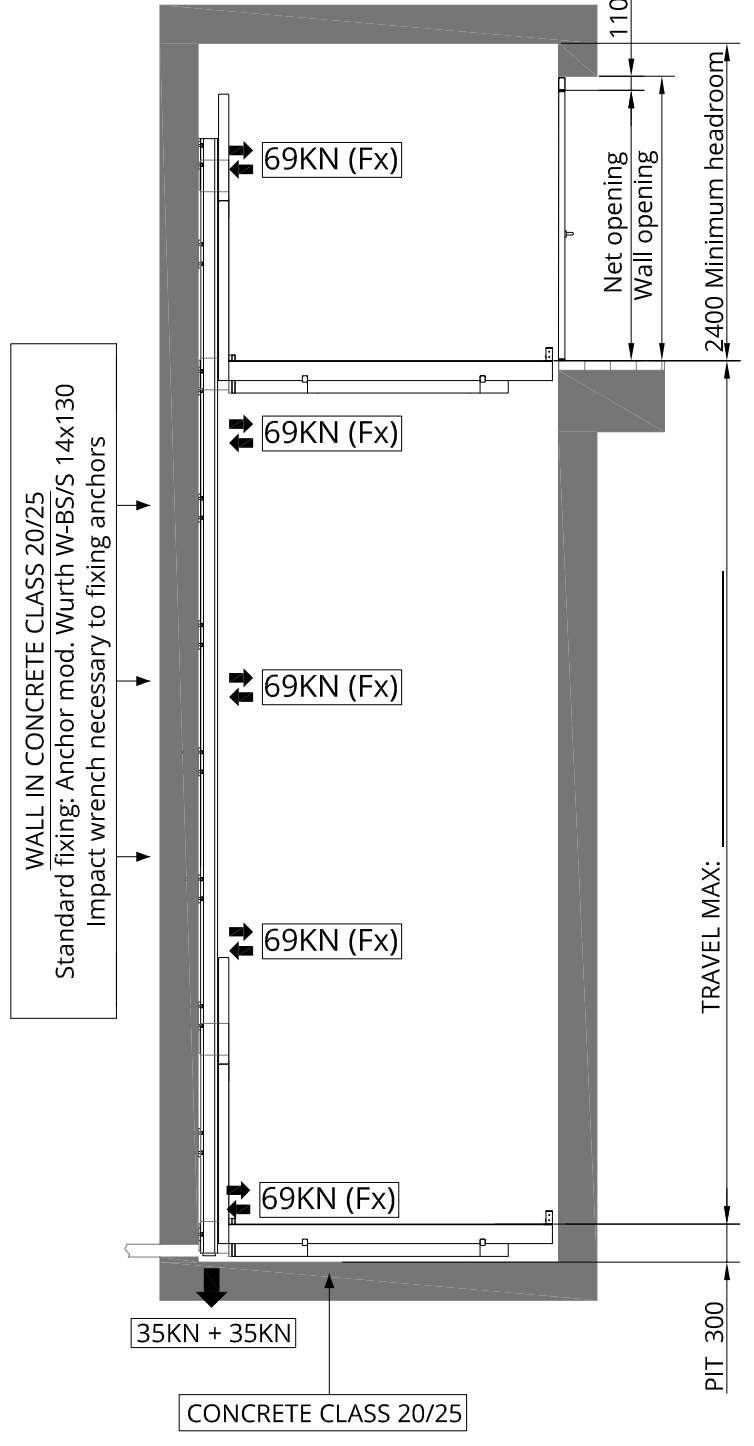


PROTECTION OF THE SHAFT: NORM UNI-EN-ISO-13857:2020

FOR PROTECTION WITH METALLIC GRID, USE A COMPACT 10x10mm

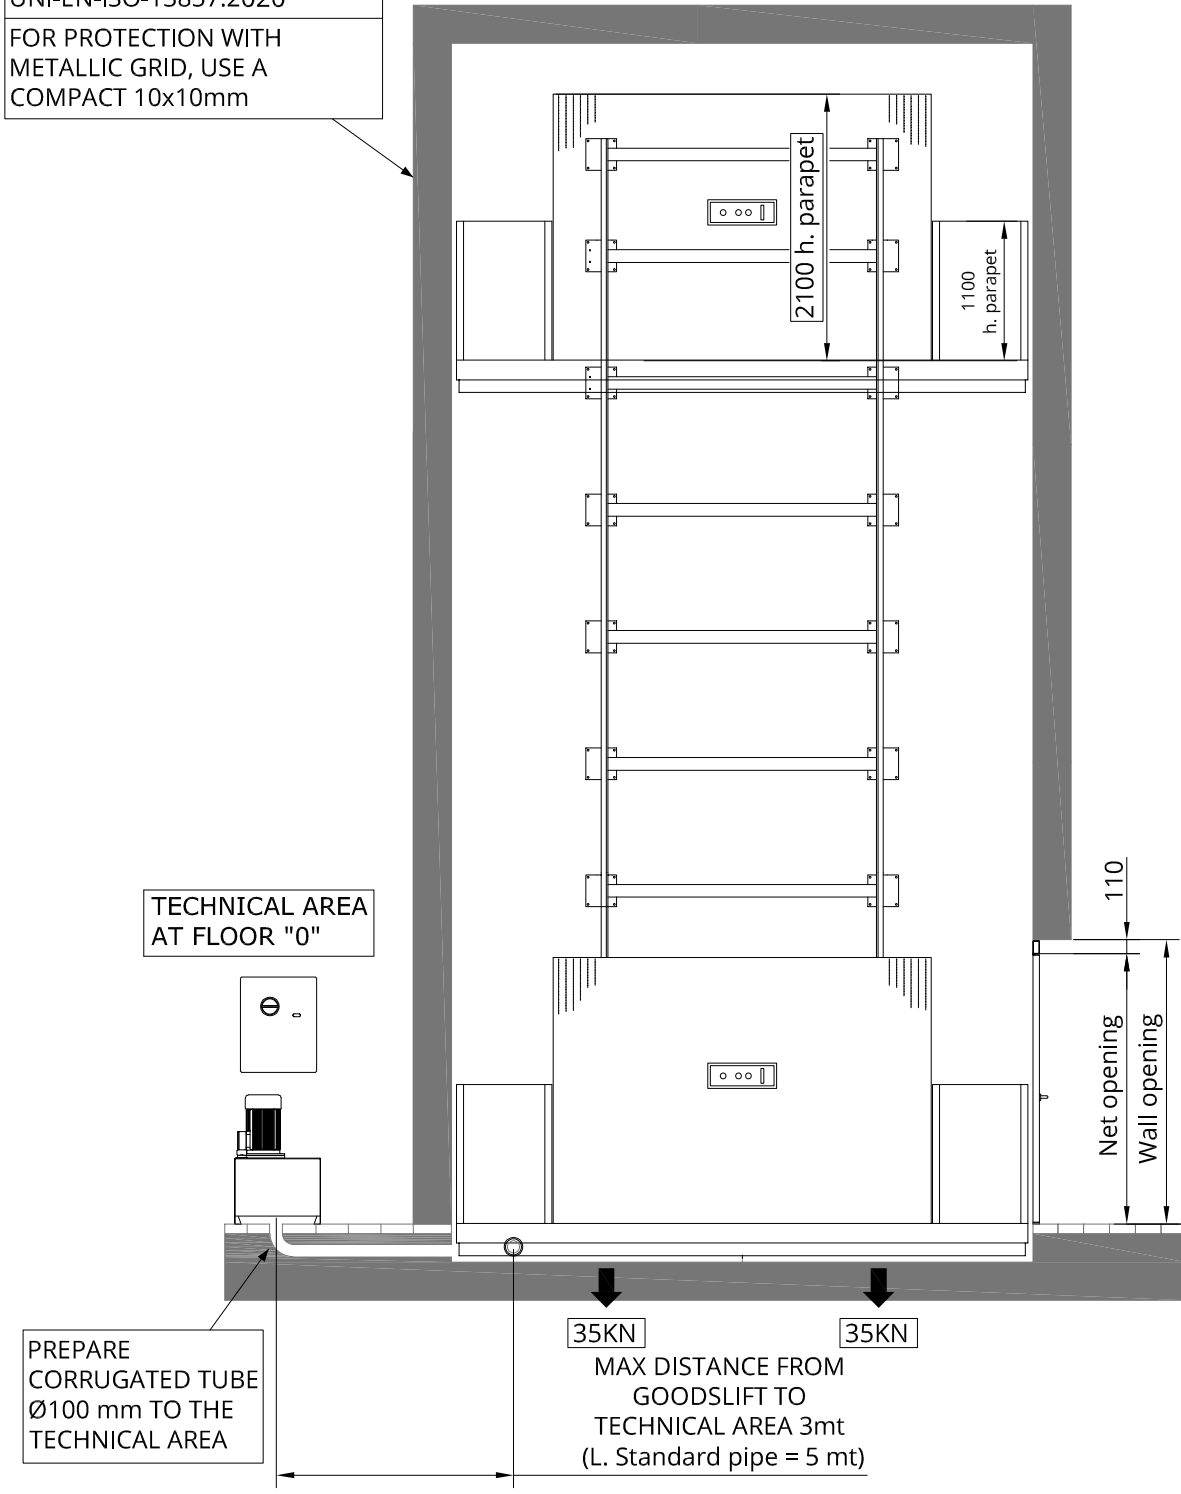

MODEL: DL2SPB - 2000Kg

PREPARE POWER F+N+T or 3F+T+N SWITH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A

Motor	Tension-functioning	Speed CM /	Starter	Rated current	Starter current
5,5kW	240 V - trifase	8,5	Direct	17	51
	400 V - trifase		Direct	10	30
11kW	240 V - trifase	15	Direct	34	102
	400 V - trifase		Direct	20	60

NOTA: THRESHOLD ADAPTATION BY THE CUSTOMER THE ADAPTATION NEEDS A 45° CHAMFER INSIDE THE SHAFT

FOR THE DOOR INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL MAX 100 mm FROM THE SHAFT DIMENSIONS (mm)

CE

DATE: _____ SIGNATURE FOR APPROVAL: _____

UPDINAMIC s.r.l. Via Modigliani, 22 - 37045 Legnago (VR) Tel. 0442.59.01.29 - Fax. 0442.59.90.91 www.updinamic.com - e-mail: info@updinamic.com

DESCRIPTION: MODEL : DL2SPB - 2000Kg

Client: _____ Date: 01/05/2024

Drawing n.: TAV-DL2DEC2-01

TRAVEL MAX: 16000mm WITH OPERATOR ON BOARD

Reference: _____

Revision: _____