



PROTECTION OF THE SHAFT: NORM UNI-EN-ISO-13857:2020
FOR PROTECTION WITH METALLIC GRID, USE A COMPACT MESH 10x10mm

FOR THE DOOR INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL MAX 100 mm FROM THE SHAFT

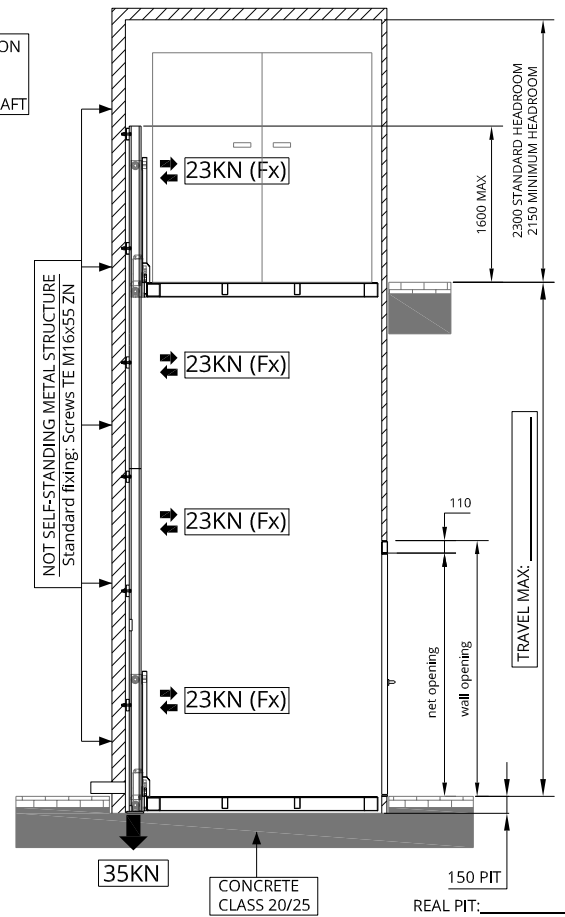

TECHNICAL AREA AT FLOOR "0"

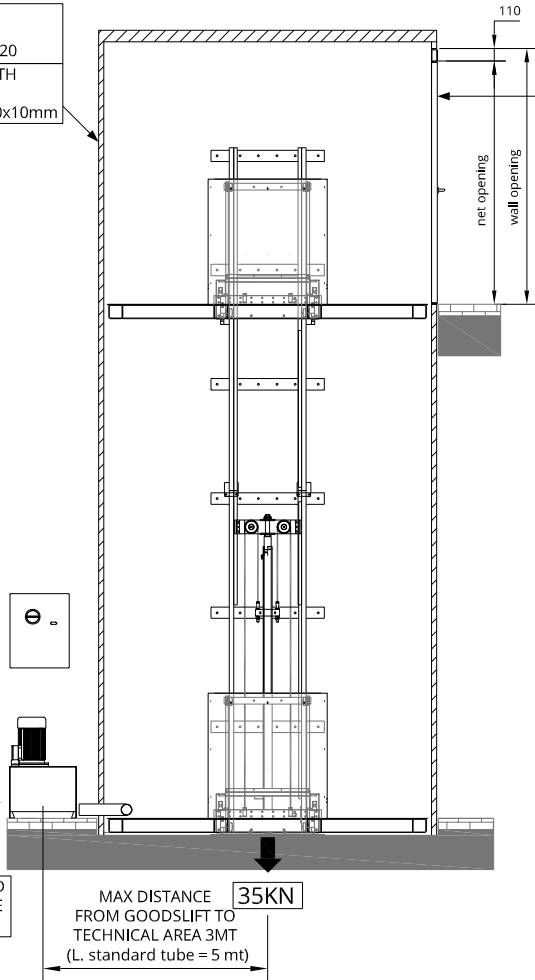

PREPARE CORRUGATED TUBE Ø100mm TO THE TECHNICAL AREA

MAX DISTANCE FROM GOODS LIFT TO TECHNICAL AREA 3MT (L. standard tube = 5 mt)

NOT SELF-STANDING METAL STRUCTURE
Standard fixing: Screws TE M16x55 ZN


CONCRETE CLASS 20/25

REAL PIT:

TECHNICAL AREA AT FLOOR "0"

PREPARE CORRUGATED TUBE Ø100mm TO THE TECHNICAL AREA

Door frame fixed on metal structure. Screws provided by UpDinamic

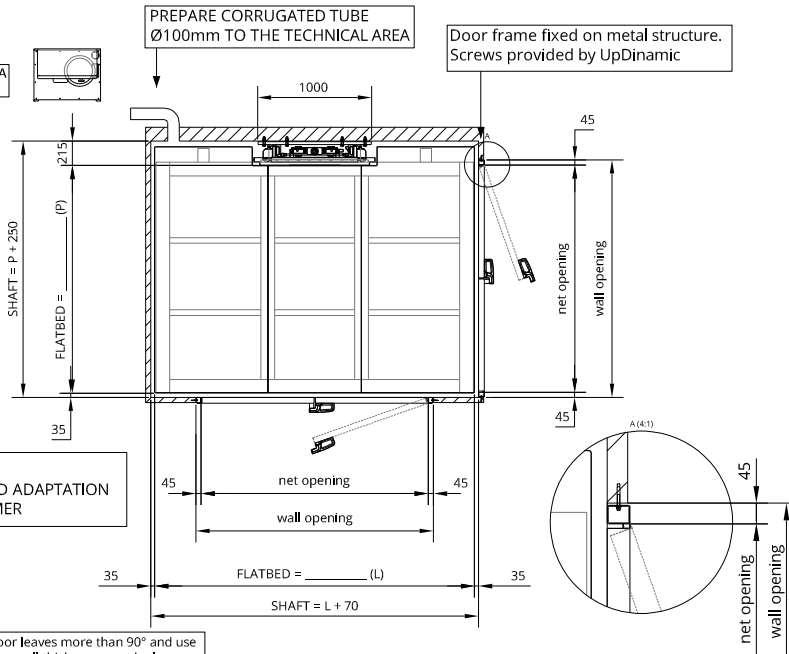

NOTE: THRESHOLD ADAPTATION BY CUSTOMER

* In order to open the door leaves more than 90° and use the full passage width, the wall thickness must be less than 100mm.

PREPARE POWER 3F-IT-4 SWITH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A


Motor	Tension-functioning	Starter	Rated Current	Current Starter
3kW	220V - trifase	Diretto	10	35
	380V - trifase	Diretto	5	22
4kW	220V - trifase	Diretto	16	50
	380V - trifase	Diretto	8	25
5,5kW	220V - trifase	Diretto	22	60
	380V - trifase	Diretto	11	35

MODEL: UP10 - 1000Kg UP15 - 1500Kg


Date: _____ Signature for approval: _____

DIMENSIONS (mm)


DIMENSIONS (mm)

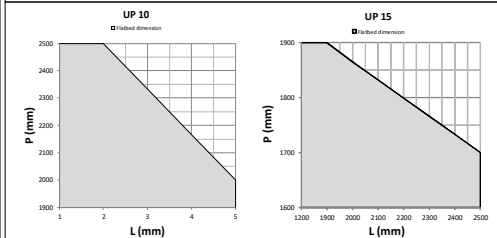

Force on the wall, Fx function of depth flatbed

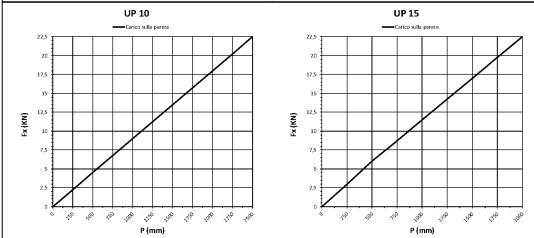

MARK THE ENTRANCES AND THE FLOORS HEIGHTS

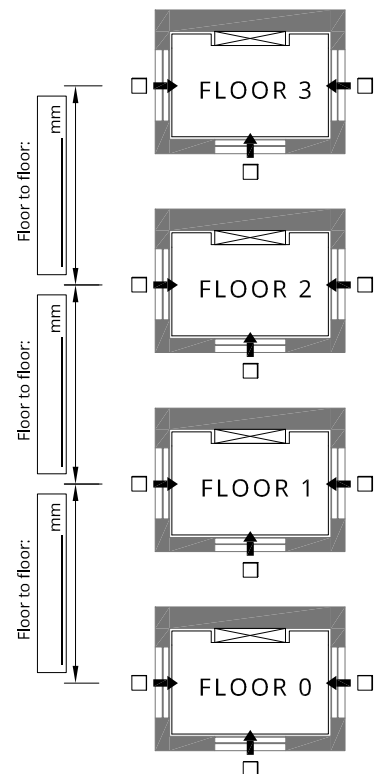

UP DYNAMIC Via Modigliani, 22 - 37045 Legnago (VR) - Tel.0442.59.01.29 - Fax. 0442.59.90.91
www.updynamic.com - e-mail: info@updynamic.com

Q.TY	DESCRIPTION:	Client:
	MODEL: UP10 - 1000Kg UP15 - 1500Kg TRAVEL MAX: 16000mm ONLY FOR GOODS	Date: 01/01/24
		TAV-UP1015-STD01