
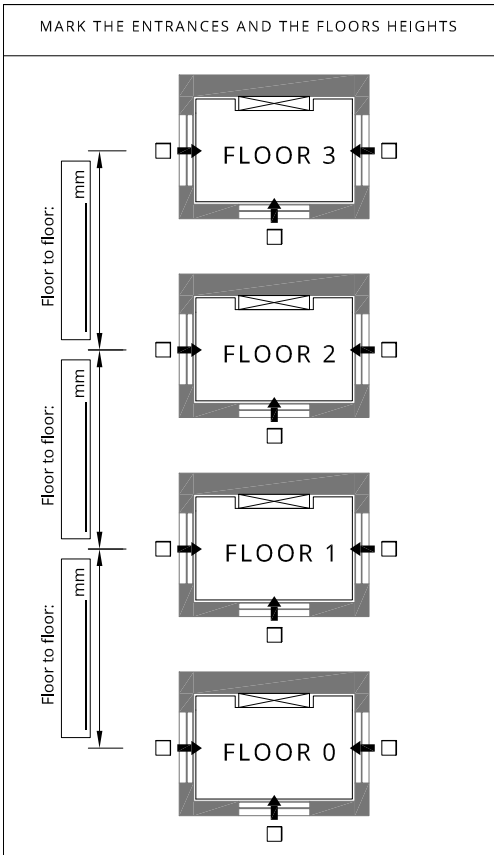
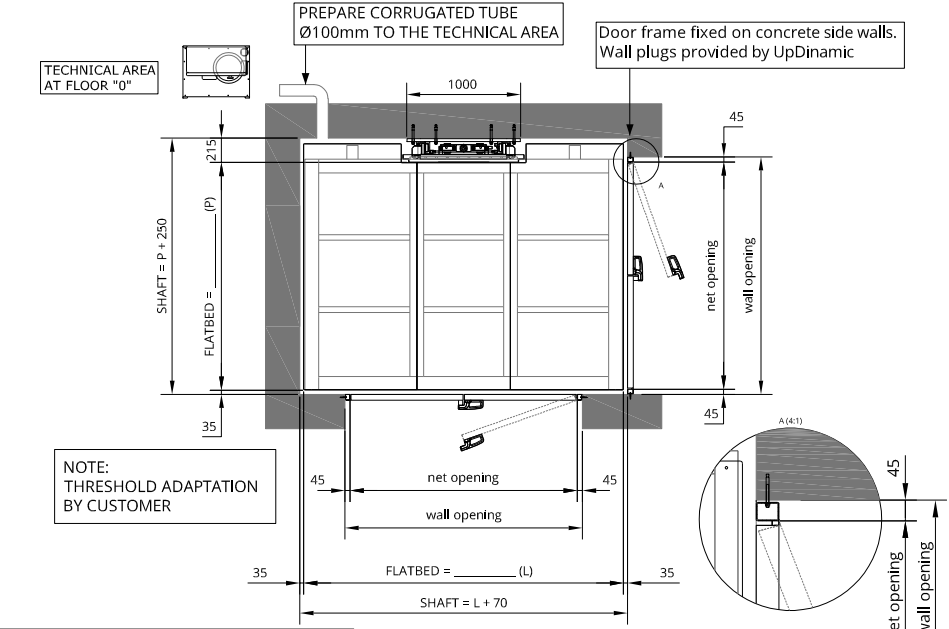
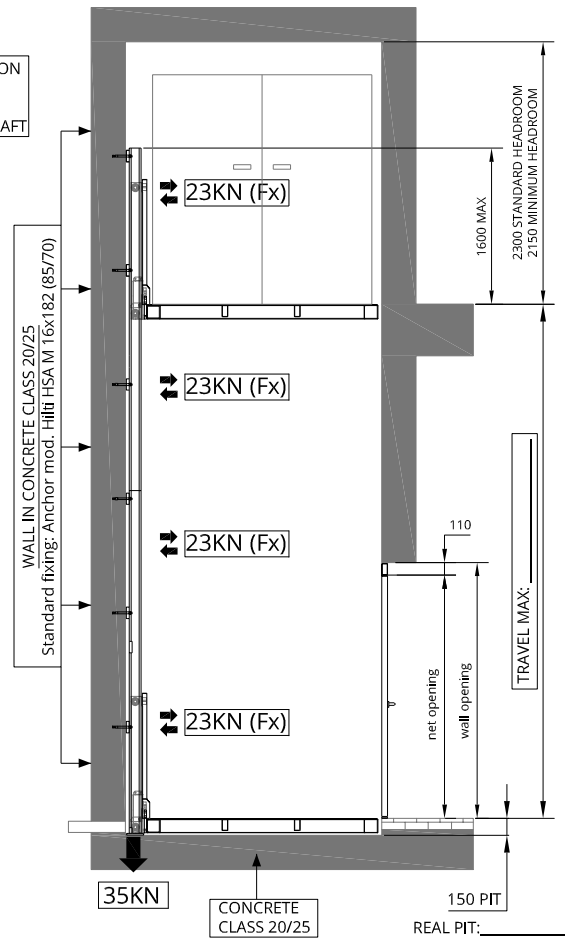


PROTECTION OF THE SHAFT: NORM UNI-EN-ISO-13857:2020  
FOR PROTECTION WITH METALLIC GRID, USE A COMPACT MESH 10x10mm

FOR THE DOOR INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL MAX 100 mm FROM THE SHAFT

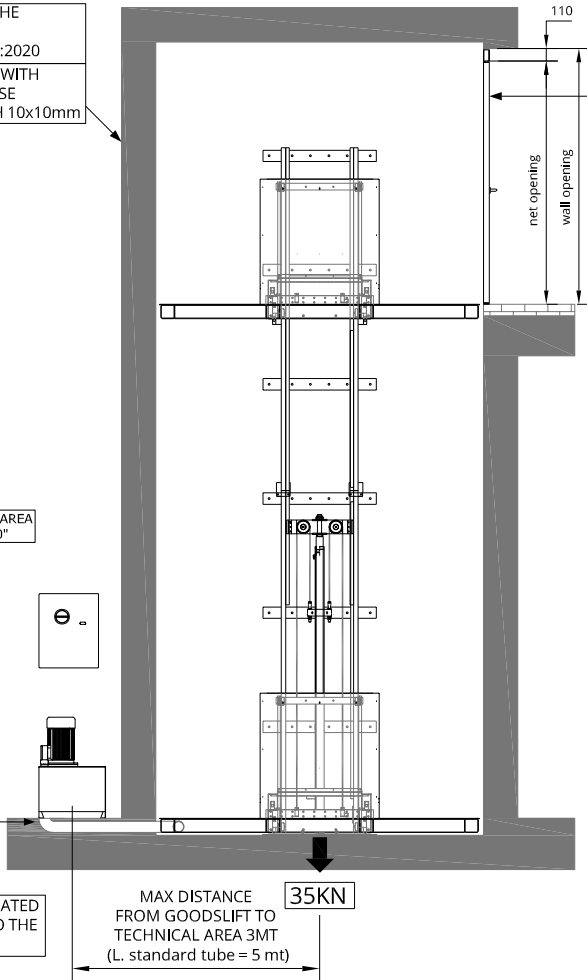



PREPARE POWER 3F-IT-A SWITH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A

| Motor | Tension-functioning | Starter | Rated Current | Current Starter |
|-------|---------------------|---------|---------------|-----------------|
| 3kW   | 220V - trifase      | Diretto | 10            | 35              |
|       | 380V - trifase      | Diretto | 5             | 22              |
| 4kW   | 220V - trifase      | Diretto | 16            | 50              |
|       | 380V - trifase      | Diretto | 8             | 25              |
| 5,5kW | 220V - trifase      | Diretto | 22            | 60              |
|       | 380V - trifase      | Diretto | 11            | 35              |

MODEL:  UP10 - 1000Kg  UP15 - 1500Kg

Date: \_\_\_\_\_ Signature for approval: \_\_\_\_\_

**DIMENSIONS (mm)**

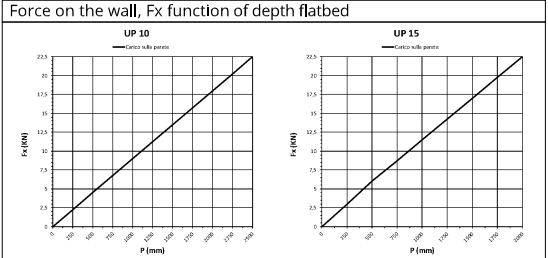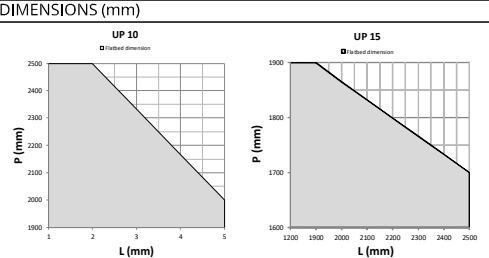

**UP DYNAMIC** Via Modigliani, 22 - 37045 Legnago (VR) - Tel.0442.59.01.29 - Fax. 0442.59.90.91  
www.updynamic.com - e-mail: info@updynamic.com

Q.TY DESCRIPTION: Client: \_\_\_\_\_ Date: 01/01/24  
MODEL: UP10 - 1000Kg UP15 - 1500Kg  
TRAVEL MAX: 16000mm  
ONLY FOR GOODS

TAV-UP1015-STD01