
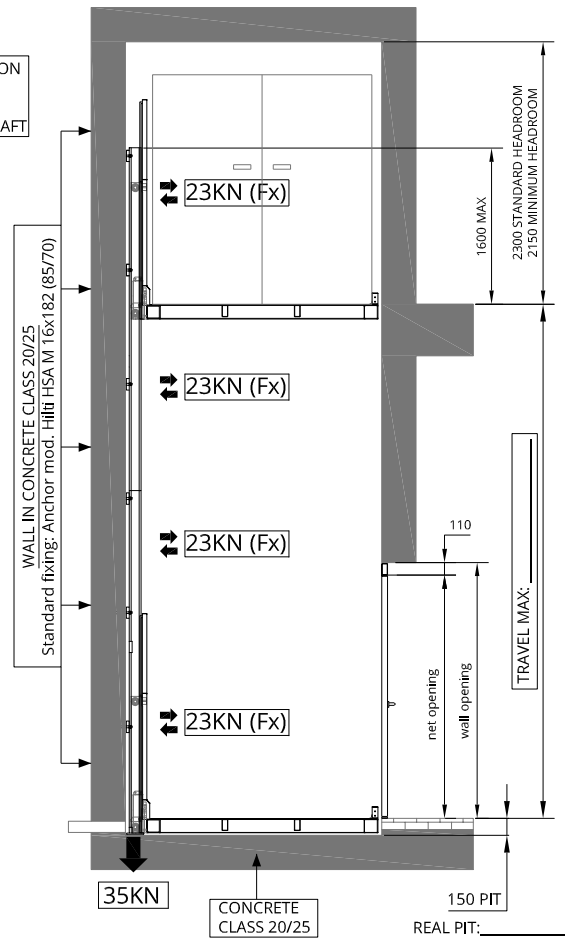


PROTECTION OF THE SHAFT: NORM UNI-EN-ISO-13857:2020
FOR PROTECTION WITH METALLIC GRID, USE A COMPACT MESH 10x10mm

FOR THE DOOR INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL
MAX 100 mm FROM THE SHAFT

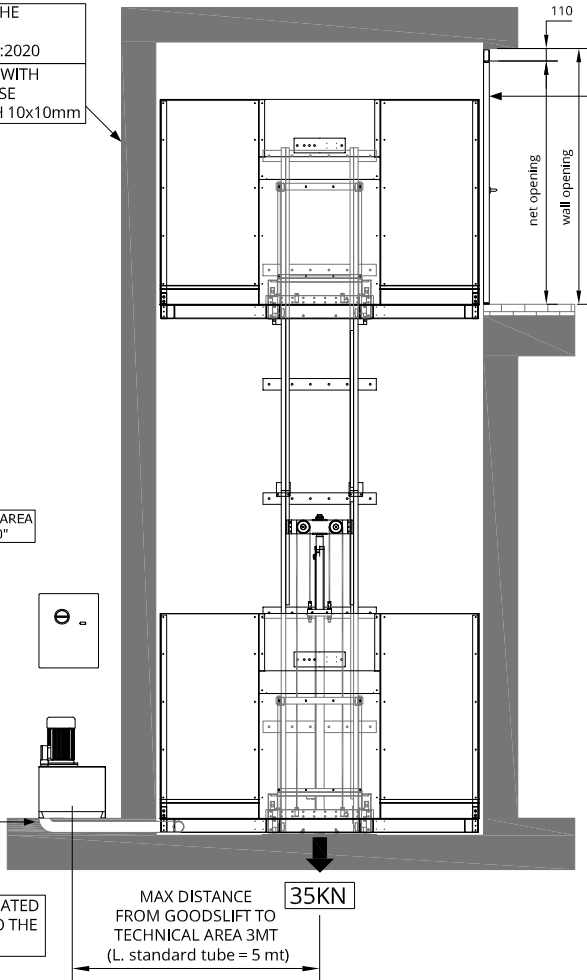

TECHNICAL AREA AT FLOOR "0"

PREPARE CORRUGATED TUBE Ø100mm TO THE TECHNICAL AREA


MAX DISTANCE FROM GOODSPLIT TO TECHNICAL AREA 3MT (L. standard tube = 5 mt)

WALL IN CONCRETE CLASS 20/25
Standard fixing: Anchor mod. Hilti HSA M 16x182 (85/70)

CONCRETE CLASS 20/25

150 PIT

TRAVEL MAX:

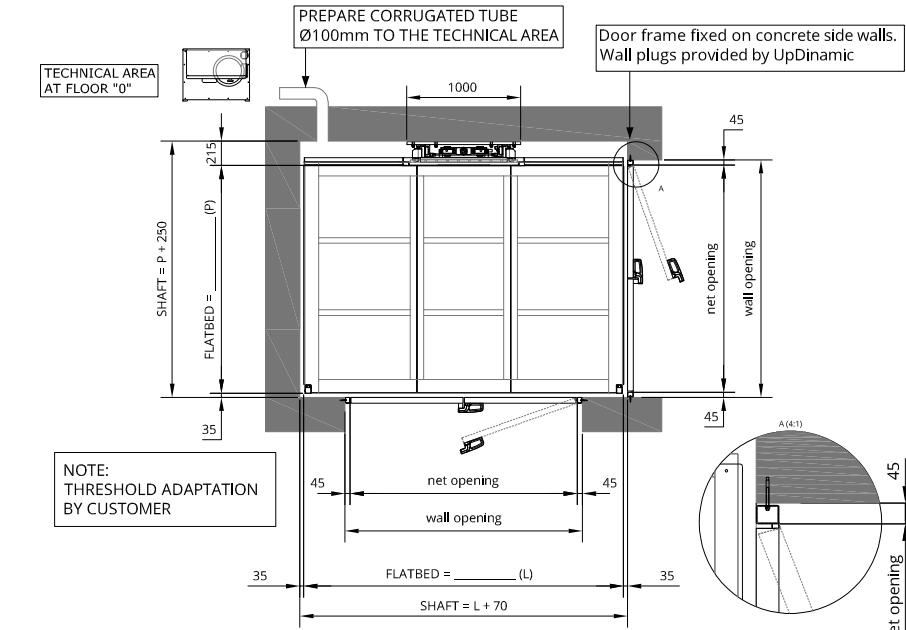

* In order to open the door leaves more than 90° and use the full passage width, the wall thickness must be less than 100mm.



PREPARE POWER 3F-IT-N SWITH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A

Motor	Tension-functioning	Starter	Rated Current	Current Starter
3kW	220V - trifase	Diretto	10	35
	380V - trifase	Diretto	5	22
4kW	220V - trifase	Diretto	16	50
	380V - trifase	Diretto	8	25
5,5kW	220V - trifase	Diretto	22	60
	380V - trifase	Diretto	11	35


MODEL: UP10 - 1000Kg UP15 - 1500Kg

Date: _____ Signature for approval: _____

DIMENSIONS (mm)

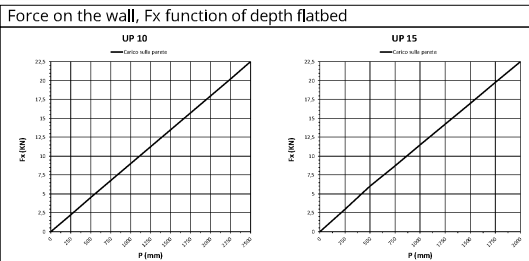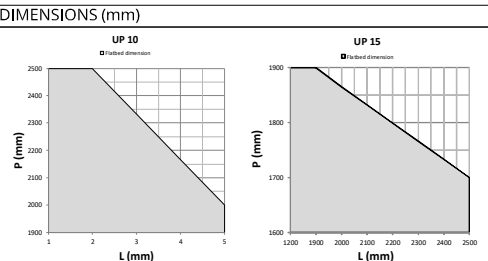

MARK THE ENTRANCES AND THE FLOORS HEIGHTS

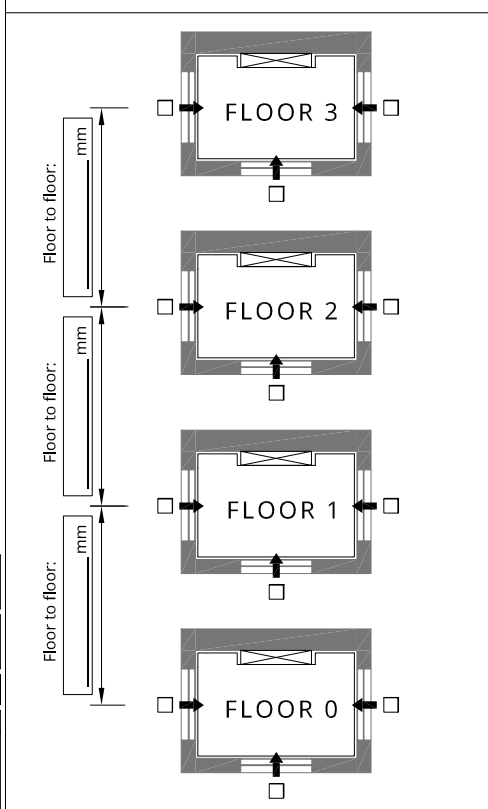

UP DINAMIC Via Modigliani, 22 - 37045 Legnago (VR) - Tel.0442.59.01.29 - Fax. 0442.59.90.91
www.updynamic.com - e-mail: info@updynamic.com

Q.TY DESCRIPTION: Client: Date: 01/01/24
MODEL: UP10 - 1000Kg UP15 - 1500Kg Drawing n°:
STROKE MAX: 16000mm TAV-UP1015-SPB01
WITH OPERATOR ON BOARD