


PROTECTION OF THE SHAFT: NORM UNI-EN-ISO-13857:2020  
FOR PROTECTION WITH METALLIC GRID, USE A COMPACT MESH 10x10mm


TECHNICAL AREA AT FLOOR "0"

PREPARE CORRUGATED TUBE Ø100mm TO THE TECHNICAL AREA

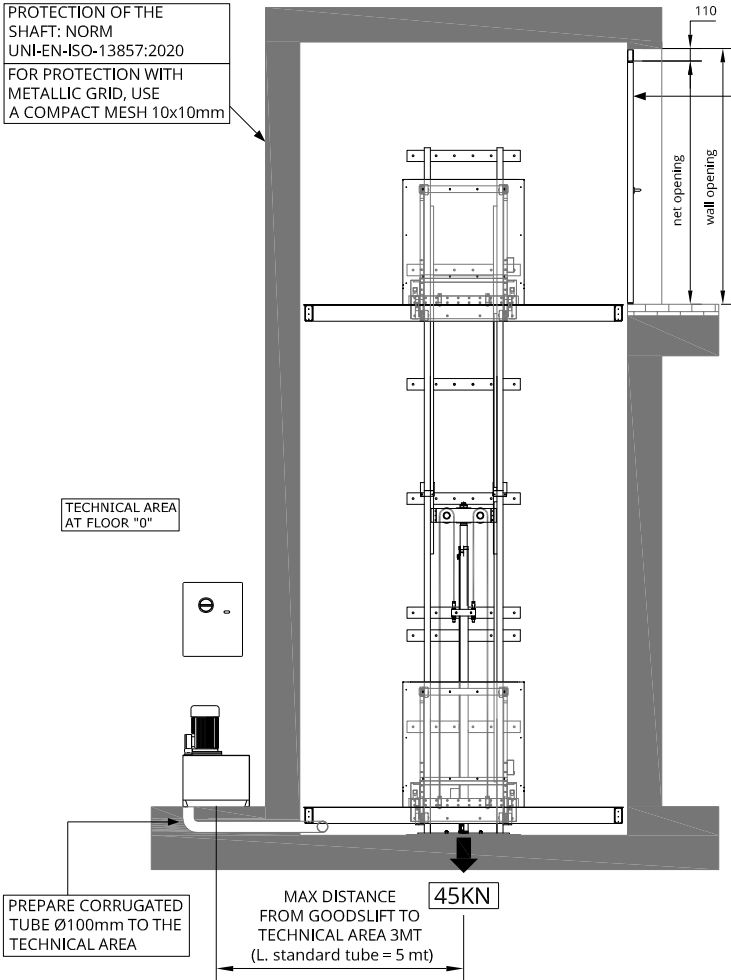

FOR THE DOOR INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL MAX 100 mm FROM THE SHAFT


WALL IN CONCRETE CLASS 20/25  
Standard fixing: Anchor mod. Hilti HSA M 16x182 (85/70)

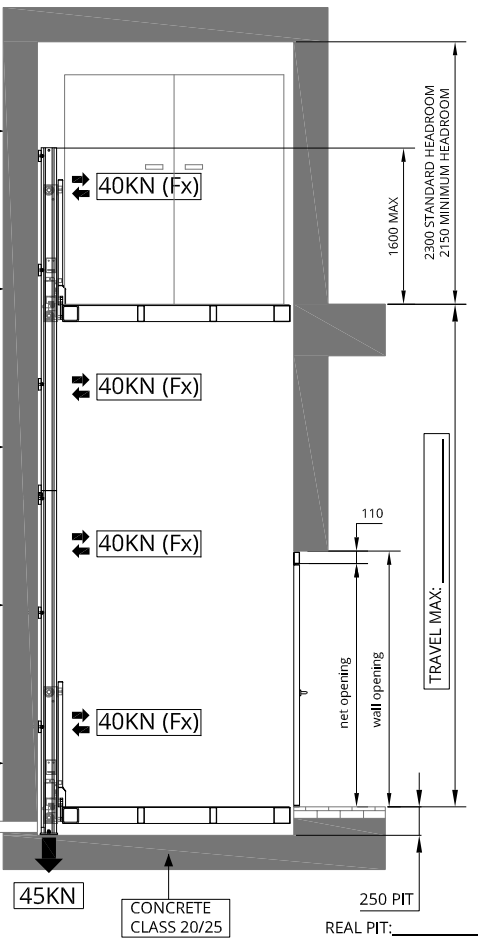

PREPARE CORRUGATED TUBE Ø100mm TO THE TECHNICAL AREA

Door frame fixed on concrete side walls. Wall plugs provided by UpDinamic

TECHNICAL AREA AT FLOOR "0"

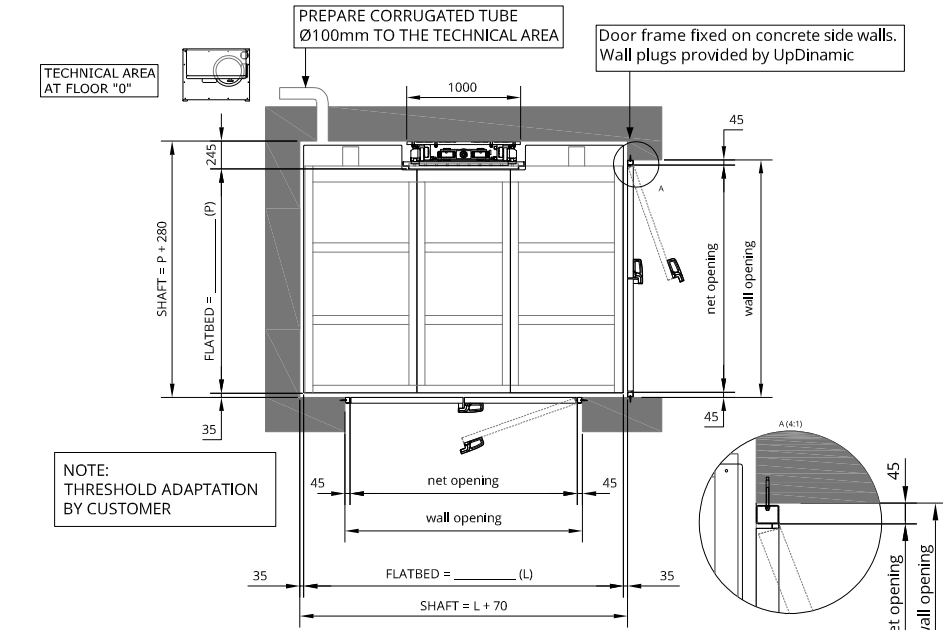

\* In order to open the door leaves more than 90° and use the full passage width, the wall thickness must be less than 100mm.



PREPARE POWER FAHNT or 3FAHNT WITH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A

Motor	Tension- functioning	Starter	Rated current	Starter current
5,5kW	220 V - trifase	Diretto	22	60
	380 V - trifase	Diretto	11	35
7,5kW	220 V - trifase	Diretto	30	90
	380 V - trifase	Diretto	14,5	45
9,2kW	220 V - trifase	Diretto	36	110
	380 V - trifase	Diretto	18	56


MODEL:  UP20 - 2000Kg  UP25 - 2500Kg

Date: \_\_\_\_\_ Signature for approval: \_\_\_\_\_

DIMENSIONS (mm)

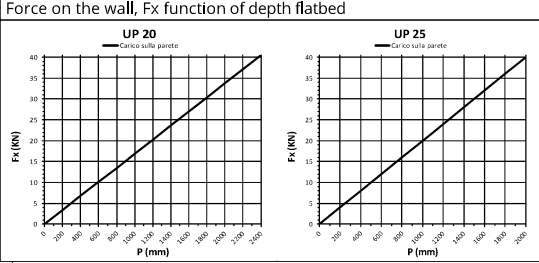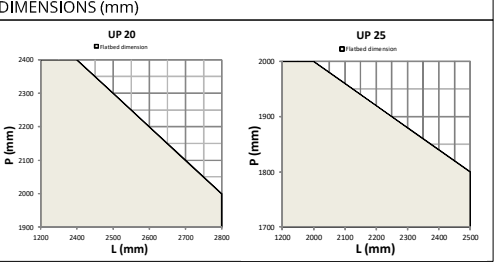

MARK THE ENTRANCES AND THE FLOORS HEIGHTS

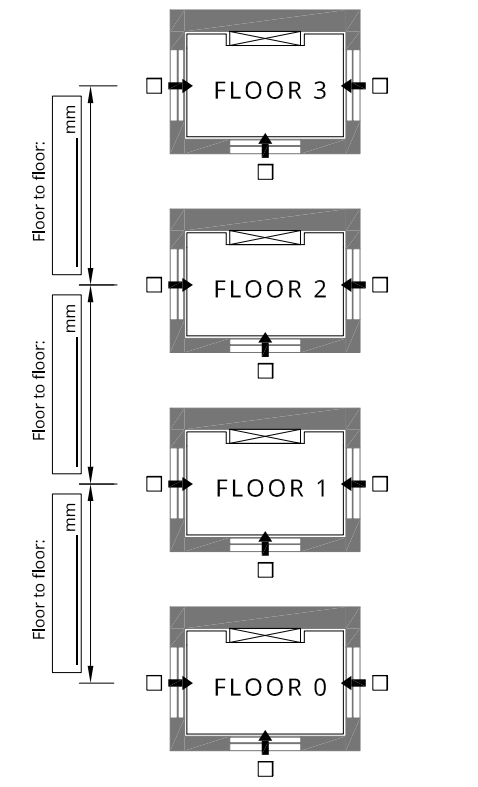

**UP DYNAMIC** Via Modigliani, 22 - 37045 Legnago (VR) - Tel.0442.59.01.29 - Fax. 0442.59.90.91  
www.updynamic.com - e-mail: info@updynamic.com

Q.TY DESCRIPTION: Client: \_\_\_\_\_ Date: 01/01/24  
Model: UP20 - 2000Kg  
UP25 - 2500Kg  
Travel Max: 16000mm  
ONLY FOR GOODS

Project: \_\_\_\_\_ Drawing n°: \_\_\_\_\_  
TAV-UP2025-STD01  
Reference: \_\_\_\_\_  
Revised: \_\_\_\_\_